



Inverter LED Plug&Light

INV P&L LED SE/SA 1H 20-60V


Control system TR

Order code 19358

EAN 8002219723727

Technical specifications

Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	1 W
Control system	TR
Autonomy	1h
Battery included	Yes
Battery type	NiCd
Battery	NiCd 7.2V 0.75Ah
Charging time	24 h
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
Out current (Qty max)	160
Operation mode	NM/M
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.33
Glow wire strength	850 °C - 30s.
Number of Batteries	1
Out power	3.2 W
Out voltage (VDC max)	60 Vdc
Out voltage (VDC min)	20 Vdc
Rest mode	Yes
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

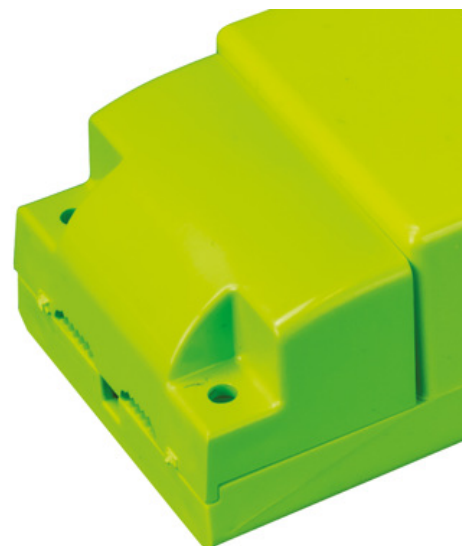


Installation and applications

Application **Offices, 043, Public Areas, Shops**

Mechanical specifications

Height	30 mm
Length	239 mm
Width	46 mm
Weight	0.5 Kg
Body material	Polycarbonate
Protection grade IP	IP40
Protection grade IK	IK08

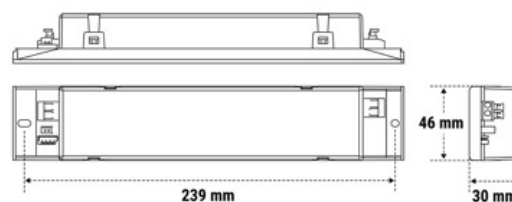

Certifications and norms

Spare parts



415414001

NC HT 7.2V 0.75 AA PACK 5264

2